


BIXXL 205.30.15.2/DALI-EU

Bixxl 200 (1xLED 51W 830/3000K 5200lm 15 °)

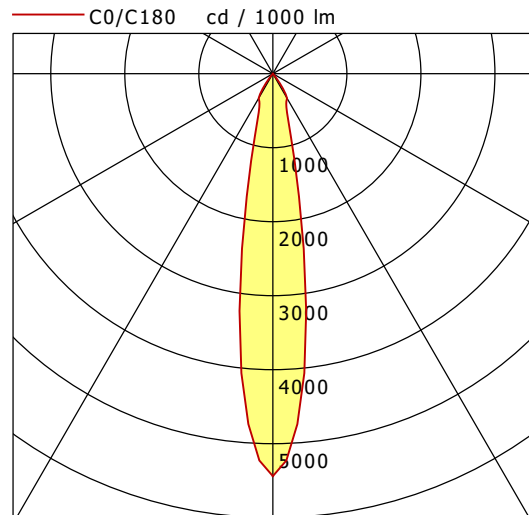

	C0	C90	C180	C270
0°	5439	5439	5439	5439
15°	1031	1031	1031	1031
30°	382	382	382	382
45°	5	5	5	5
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.98	3142.2
6.0	1.95	785.6
9.0	2.93	349.1
12.0	3.90	196.4
15.0	4.88	125.7

η	LED
Efficiency	102 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	51 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.6
UGR C90/C270	18.6
CIE Flux Codes	99 99 100 100 100
Ra/CRI	> 80