



BIXXL 205.40.25.2/DALI-EU

Bixxl 200 (1xLED 51W 840/4000K 5400lm 25 °)

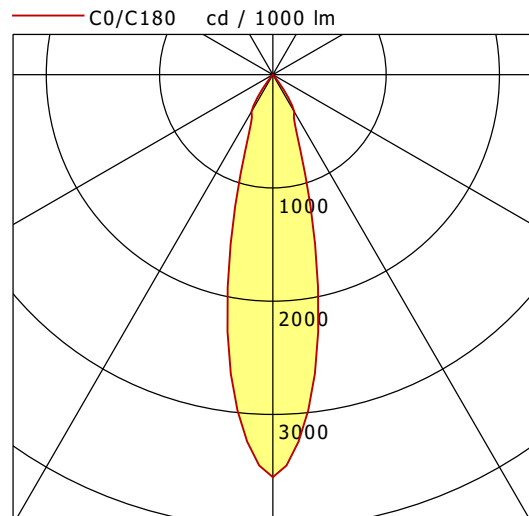

	C0	C90	C180	C270
0°	3554	3554	3554	3554
15°	1367	1367	1367	1367
30°	377	377	377	377
45°	5	5	5	5
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

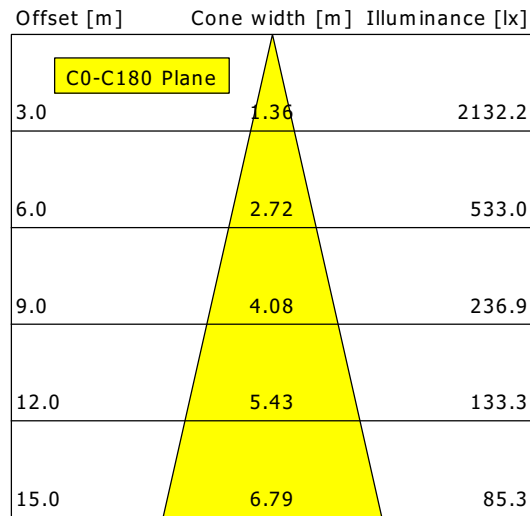

η	LED
Efficiency	106 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	51 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.7
UGR C90/C270	18.7
CIE Flux Codes	99 99 100 100 100
Ra/CRI	>80