


BIXXL 205.40.15.2/DALI-EU

Bixxl 200 (1xLED 51W 840/4000K 5420lm 15 °)

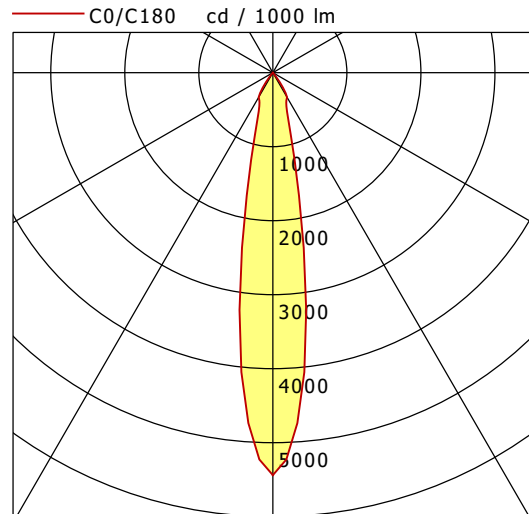

	C0	C90	C180	C270
0°	5439	5439	5439	5439
15°	1031	1031	1031	1031
30°	382	382	382	382
45°	5	5	5	5
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.98	3275.2
6.0	1.95	818.8
9.0	2.93	363.9
12.0	3.90	204.7
15.0	4.88	131.0

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	51 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.8
UGR C90/C270	18.8
CIE Flux Codes	99 99 100 100 100
Ra/CRI	>80