

lightnet

Cubic-F2

Free standing luminaire - Direct/indirect light distribution

Article code: CF2ABX-840H-L600-U-A



Illustrations may only be similar and serve as an orientation.

Cubic-F2. LED. Free standing luminaire. Luminaire head with 25mm minimalist overall height. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR<=19. Separate stepless dimming of the direct/indirect light chambers. LxWxH (luminaire head, rectangular/Stand). L=600mm. W=300mm. H=2000/25mm.



High-power current. 15300lm. 92W. 19,5kg. Binning initial <= MacAdam 3. U-formed floor base matching luminaire's outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Cubic-F2

Free standing luminaire - Direct/indirect light distribution

Article code: CF2ABX-840H-L600-U-A

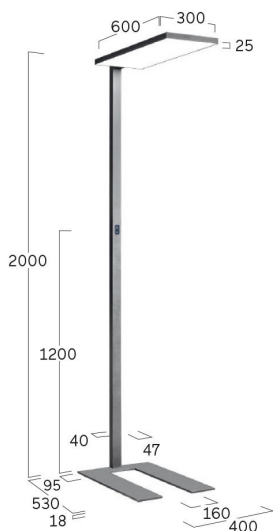

Customer / Project: _____

Note: _____

| | |
|------------------------------|------------------------------------|
| Productname | Cubic-F2 |
| Lamp | LED |
| Installation Type | Free standing luminaire |
| Surface finish | Jet Black |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Separately stepless dimmable |
| Length L/Diameter D (mm) | L=600mm |
| Width W (mm) | W=300mm |
| Height H (mm) | H=2000/25mm |
| Current/Power | High-Power |
| Luminous Flux | 15300lm |
| Power consumption | 92W |
| Base-Type | U-base |
| Plug | Schuko CEE 7/7 (E+F) |
| Degree of protection | IP20 |
| Certification | Prüfzeichen: ENEC |
| LED lifetime | L80B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 40 / 3 3 9 |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 19,5kg |

