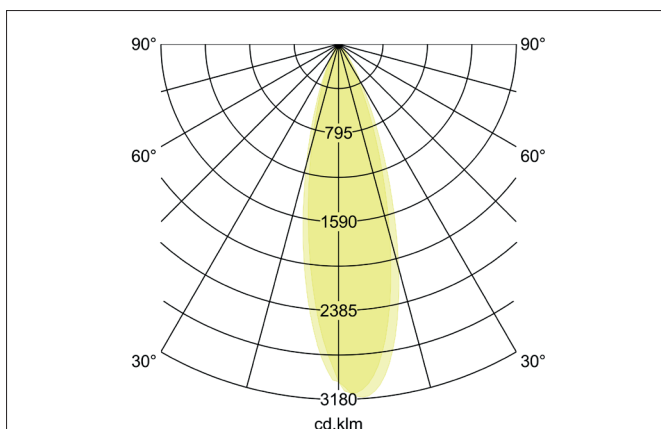
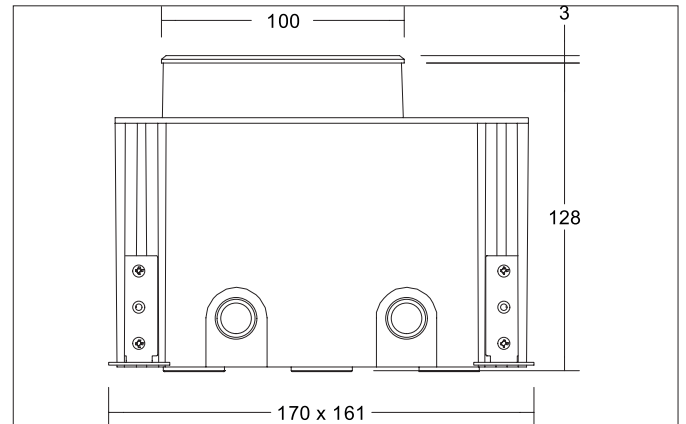


**LANKA-R LED recessed floor light, V4A, IP67, switchable**

Article no. 14665223

Light.  
For Generations.**Tender**

LED recessed floor light, V4A, IP67, switchable, Round. Ceiling cut-out L x W 161 x 170 mm, Installation depth 128 mm, Outer diameter 100 mm, Weight 1,070 kg, optimal light distribution due to a glass transparent cover. Luminous flux 460 lm, Power 1 x 4 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Aluminium / Glass, Colour: Stainless steel, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK08. With electronic driver, on/off switchable.

| Article data       |  |
|--------------------|--|
| Article no.        | 14665223   |
| GTIN               | 4255752500971  |
| Series name        | LANKA-R  |
| Short description  | LED recessed floor light, V4A, IP67, switchable  |
| Material           | Stainless steel / Aluminium / Glass  |
| Colour             | Stainless steel  |
| Shape              | Round  |
| Outer diameter     | 100 mm   |
| Built-in width     | 170 mm   |
| Built-in length    | 161 mm   |
| Installation depth | 128 mm   |
| Scope of delivery  | incl. converter for connection to 230 V mains voltage, switchable, floor installation pot and 5,000 mm connection cable. |
| Weight             | 1.070 kg   |

**LANKA-R LED recessed floor light, V4A, IP67, switchable**

Article no. 14665223

Light.  
For Generations.

| Lighting technology          |                      |
|------------------------------|----------------------|
| Colour temperature           | 3.000 K              |
| Light colour                 | White                |
| Light output                 | Direct               |
| Luminous flux                | 460 lm               |
| System efficiency            | 115 lm/W             |
| Colour rendering             | CRI > 80             |
| Beam angle                   | 30°                  |
| Light sharing                | Symmetric/asymmetric |
| Adjustable color temperature | No                   |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 4 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP67   |
| Ambient temperature                   | -20 bis +45°C  |
| Dimmable                              | No   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Operating technology of driver  |        |
|---------------------------------|--------|
| AC nominal voltage max          | 230 V  |
| Frequency max                   | 50 Hz  |
| Protection class                | I      |
| Degree of protection            | IP67   |
| Power                           | 4 W    |
| Suitable for emergency lighting | No     |
| Control                         | on/off |
| Flicker-free                    | Yes    |

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Recessed mounting |
| Place of installation       | Floor-mounted     |
| Adjustability               | Pivoted           |
| Swivel angle                | 30°               |
| Max. load                   | 1,000 kg          |
| Over rollable               | No                |
| Impact resistance           | IK08              |
| Further references          | V4A               |
| Material cover              | Glass transparent |
| Circlip                     | Without circlip   |
| Suitable for through-wiring | Yes               |

**LANKA-R LED recessed floor light, V4A, IP67, switchable**  
Article no. 14665223Light.  
For Generations.

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 1.281 kg   |
| Length of packaging     | 205 mm   |
| Packaging width         | 205 mm   |
| Packaging height        | 160 mm   |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |